

RENTA 60V

55kVA
1500 RPM
230/415V
50 Hz



Engine
ISUZU 4JJ1

Optional accessories
available.



Sound pressure at 7mtr

Measurements and Weight

| | Length (L) [mm] | Width (W) [mm] | Height (H) [mm] | Volume [m3] | Dry Weight [kg] | Fuel tank [L] | Wet Weight [kg] | Urea / DEF [L] |
|--------------|--------------------|-------------------|--------------------|----------------|--------------------|---------------|--------------------|-------------------|
| Low Base | 2700 | 1060 | 1730 | 4.95 | 1820 | 150 | 2010 | 28 |
| Fork Pockets | 2700 | 1060 | 1841 | 5.26 | 1920 | 150 | 2110 | 28 |

General Specifications

| | |
|-------------------|---------|
| Revolutions [rpm] | 1500 |
| Voltage(s) [V] | 230/415 |
| Frequency [Hz] | 50 |
| Power Factor | 0.8 |

Power

| | Prime Power | Standby Power |
|---------------|-------------|---------------|
| Power in kVA* | 55 | 60 |
| Power in KW | 44 | 48 |


*kVA (Kilovolt-ampere): The most common unit for measuring the power of a generator. 1 kVA is equivalent to approximately 0.8 kilowatts power.

Sockets

| Quantity | Type | AMPS | Voltage |
|----------|--------|------|---------|
| 1 | 3P+N+E | 63A | 415V |
| 1 | 3P+N+E | 32A | 415V |
| 3 | 2P+PE | 32A | 230V |

Emissions certificate

This model complies with the European Regulation 2016/1628 NRMM on Stage V gas emissions.

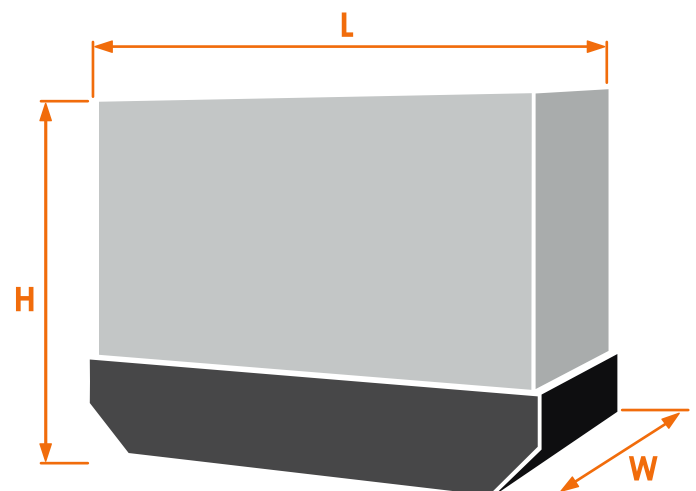

The information included in this document is only illustrative, it may vary without prior notice and therefore no contractual relationship is established. The logos, trademarks and data may be subject to copyright of their respective companies.

