Denyo

MORRIS MACHINERY

EVENTA 20V

17 kVA 1500 RPM 230/415V 50 Hz

STAG

EMISSIONS COMPLIANT



Engine Yanmar 4TNV88

Optional accesories available.



Measurements and Weight

		Length (L) [mm]	Width (W) [mm]	Height (H) [mm]	Volume [m3]	Dry Weight [kg]	Fuel tank [L]	Wet Weight [kg]
	Low Base	1635	860	1337	1.88	765	92	865
	Fork Pockets	1635	860	1447	2.03	840	92	940

General Specifications

Revolutions [rpm]	1500	
Voltage(s) [V]	230/415	
Frequency [Hz]	50	
Power Factor	0.8	

Power

	Prime Power	Standby Power	
Power in kVA*	17	17.85	
Power in KW	13.6	14.3	


*kVA (Kilovolt-ampere): The most common unit for measuring the power of a generator. 1 kVA is equivalent to approximately 0.8 kilowatts power.

Sockets

Quantity	Туре	AMPS	Votage	
3	2P+E	32A	230V	
1	3P+N+E	32A	415V	

Emissions certificate

This model complies with the European Regulation 2016/1628 NRMM on StageV gas emissions.

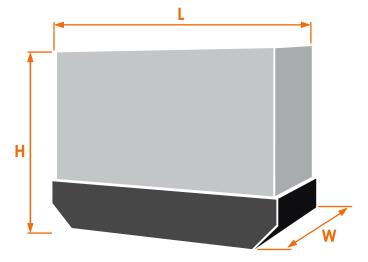

The information included in this document is only illustrative, it may vary without prior notice and therefore no contractual relationship is established. The logos, trademarks and data may be subject to copyright of their respectives companies.



