

Denyo

MORRIS MACHINERY

RENDA 20V

17.5kVA
1500 RPM
230/415V
50 Hz



Engine
Yanmar 4TNV88

Optional accessories
available.



Sound pressure at 7mtr

Measurements and Weight

	Length (L) [mm]	Width (W) [mm]	Height (H) [mm]	Volume [m3]	Dry Weight [kg]	Fuel tank [L]	Wet Weight [kg]
Low Base	1635	750	1210	1.48	670	62	740
Fork Pockets	1635	750	1320	1.61	710	62	780

General Specifications

Revolutions [rpm]	1500
Voltage(s) [V]	230/415
Frequency [Hz]	50
Power Factor	0.8

Power

	Prime Power	Standby Power
Power in kVA*	17.5	19
Power in KW	14	15


*kVA (Kilovolt-ampere): The most common unit for measuring the power of a generator. 1 kVA is equivalent to approximately 0.8 kilowatts power.

Sockets

Quantity	Type	AMPS	Voltage
3	2P+E	32A	230V
1	3P+N+E	32A	415V

Emissions certificate

This model complies with the European Regulation 2016/1628 NRMM on StageV gas emissions.

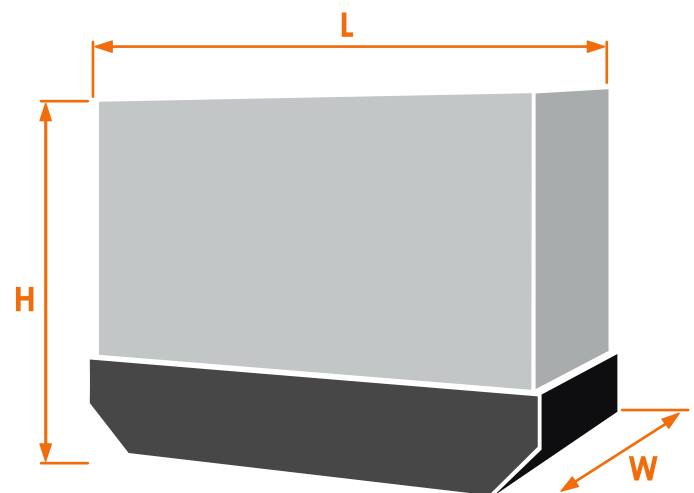

The information included in this document is only illustrative, it may vary without prior notice and therefore no contractual relationship is established. The logos, trademarks and data may be subject to copyright of their respective companies.

