

RDW40SP/S5

40 kVA
1500/1800 RPM
230/400V - 277/480V
50/60Hz



Engine
Deutz TD2.9L4

Alternator
Stamford - S1L2K1

Optional accessories available.



61dB	50/60 Hz	3 ~	230/400V	277/480V	1500/1800 rpm
------	----------	-----	----------	----------	---------------

Sound pressure at 7mtr

Measurements and Weight

	Length (L) [mm]	Width (W) [mm]	Height (H) [mm]	Volume [m3]	Dry Weight [kg]	Wet Weight [kg]	Fuel Tank [L]
SuperSilence	2505	1250	1750	5.48	1900	2125	225

General Specifications

Revolutions [RPM]	1500/1800
Voltage(s) [V]	230/400 - 277/480
Frequency [Hz]	50/60
Power Factor	0.8


Power

	Prime Power	Standby Power
Power in kVA*	40	44
Power in KW	32	35

*kVA (Kilovolt-ampere): The most common unit for measuring the power output of a generator. 1 kVA x power factor = 0.8 kilowatts.

Sockets

Quantity	Type	AMPS	Voltage
1	3P+N+E	63A	415V
1	3P+N+E	32A	415V
1	3P+N+E	16A	415V
1	2P+E	16A	230V

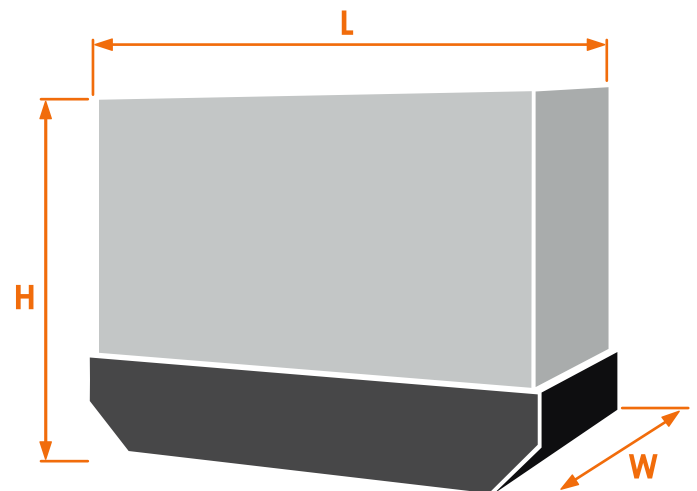

Emissions Certificate

This model complies with the European Regulation 2016/1628 NRMM on StageV gas emissions.

The information included in this document is only illustrative, it may vary without prior notice and therefore no contractual relationship is established. The logos, trademarks and data may be subject to copyright of their respective companies.

