

RENDA 100V

100kVA
1500 RPM
230/415V
50 Hz



Engine
ISUZU 4HK1

Optional accessories
available.



Measurements and Weight

	Length (L) [mm]	Width (W) [mm]	Height (H) [mm]	Volume [m3]	Dry Weight [kg]	Fuel tank [L]	Wet Weight [kg]	Urea / DEF [L]
Low Base	3100	1300	1840	7.44	2520	250	2830	28
Fork Pockets	3100	1300	1990	8.05	2600	250	2910	28

General Specifications

Revolutions [rpm]	1500
Voltage(s) [V]	230/415
Frequency [Hz]	50
Power Factor	0.8

Power

	Prime Power	Standby Power
Power in kVA*	100	110
Power in KW	80	88


*kVA (Kilovolt-ampere): The most common unit for measuring the power of a generator. 1 kVA is equivalent to approximately 0.8 kilowatts power.

Sockets

Quantity	Type	AMPS	Voltage
1	3P+N+E	125A	415V
1	3P+N+E	63A	415V
1	3P+N+E	32A	415V
3	2P+PE	32A	230V

Emissions certificate

This model complies with the European Regulation 2016/1628 NRMM on StageV gas emissions.

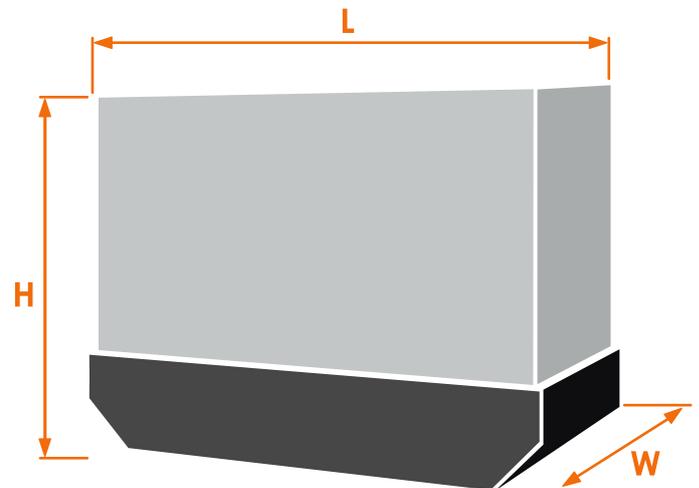

The information included in this document is only illustrative, it may vary without prior notice and therefore no contractual relationship is established. The logos, trademarks and data may be subject to copyright of their respective companies.

