

RENTA 40V

37kVA
1500 RPM
230/415V
50 Hz



Engine
Kubota V3800

Optional accessories available.



Sound pressure at 7mtr

Measurements and Weight

	Length (L) [mm]	Width (W) [mm]	Height (H) [mm]	Volume [m3]	Dry Weight [kg]	Fuel tank [L]	Wet Weight [kg]
Low Base	2015	940	1670	3.16	1220	110	1330
Fork Pockets	2015	940	1750	3.31	1310	110	1420

General Specifications

Revolutions [rpm]	1500
Voltage(s) [V]	230/415
Frequency [Hz]	50
Power Factor	0.8

Power

	Prime Power	Standby Power
Power in kVA*	37	40.7
Power in KW	29.6	32.6


*kVA (Kilovolt-ampere): The most common unit for measuring the power of a generator. 1 kVA is equivalent to approximately 0.8 kilowatts power.

Sockets

Quantity	Type	AMPS	Voltage
3	2P+E	32A	230V
1	3P+N+E	63A	415V

Emissions certificate

This model complies with the European Regulation 2016/1628 NRMM on StageV gas emissions.

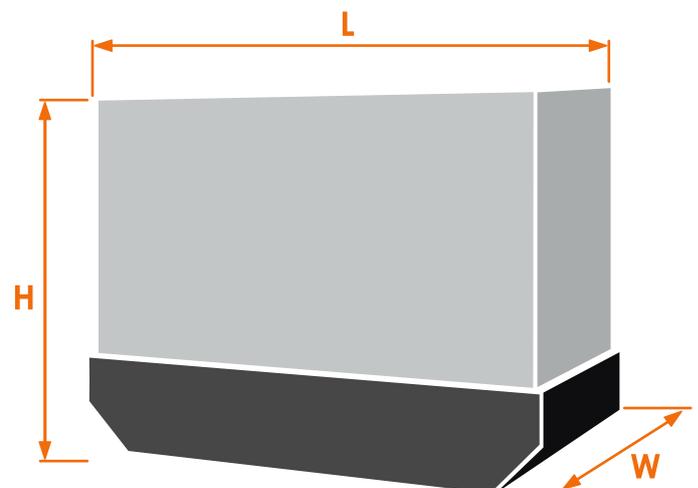

The information included in this document is only illustrative, it may vary without prior notice and therefore no contractual relationship is established. The logos, trademarks and data may be subject to copyright of their respective companies.

